


Tyre Repair Machine

TBR Repair Machine

High standards, High level



PCR Repair Machine



快速三维轿车轮胎修补机

Sedan Tire Repair Vulcanizer



产品特点：

- 1、抽拉式设计，快速放入轮胎，修补更快捷；
- 2、上模、下模、侧模三个模具可同时加热；
- 3、胎侧、胎冠、胎肩三个面可同时修补；
- 4、修补范围：145-235型小型车辆轮胎。

Product Features:

- 1, Slide type design, fast put into, repair faster;
- 2, The upper mould, lower mould and side mold, three mold can be heated at the same time;
- 3, The side of the tire, tread, the tire shoulder three surface can repair at the same time;
- 4, Repair types: 145-235 small vehicle tires.

抽拉式设计，装取轮胎更快捷！



编 号	规 格	L*W*H(CM)	台重(kg)	装箱数	整箱尺寸(CM)	整箱重(kg)
21201	快速三维补胎机	70*33*85	50	1	73*36*95	58

气动快速轿车补胎机-下模可旋转 Pneumatic Tire Vulcanizing Machine

新产品
NEW PRODUCTS



胎面伤口修补



胎肩伤口修补



胎侧伤口修补



产品优点：

- 1、下模多向旋转，8种弧面，提供最佳修补面，修补效果更完美。
- 2、定时自动控温，修补完成自动断电，气缸自动回升。
- 3、内外同时加热修补速度提高一倍。
- 4、可修补145-235轿车轮胎胎侧、胎面、胎肩伤口。

Product features:

- 1, The lower mould 360 degree rotation, 8 cambered surface, provide the best repair surface, repair effect more perfect.
- 2, Automatic temperature control, automatic power-off, repair completed, automatic recovery.
- 3, External and internal heating at the same time, save half time.
- 4, Repair types: 145-235 small vehicle tires, tire sidewall, tread, the tire shoulder wound.

编 号	规 格	L*W*H (CM)	台重(kg)	装箱数	整箱尺寸(CM)	整箱重(kg)
21101	旋转模气动补胎机	160*75*45	80	1	160*75*45	90

定时调温补胎机

- 1、可修补各种车辆内胎、小车外胎、真空胎
- 2、可更换各种车辆内胎气门咀（铝模选购）
- 3、用户可自行设定修补温度，自动保持恒温
- 4、定时关机

Timing Tube Plate Vulcanizer

- Thermostatically control
- Automatically shutdown and music on with timer



编 号	规 格	L*W*H (CM)	台重(kg)	装箱数	整箱尺寸(CM)	整箱重(kg)
20100	定时调温补胎机	32*30*40	12	1	32*31*41	13

调温补胎机

- 1、可修补各种车辆内胎、小车外胎、真空胎
- 2、用户可自行设定修补温度，自动保持恒温。

Tube Plate Vulcanizer

It can be used in repairing all kinds of inner tube, car tire and replacing tube valve sui. This tube plate will make a better repair on the most common size of tube at a lower cost than any other machine.

- Energy-saving 30%
- Thermostatically control
- Heat up quickly



编 号	规 格	L*W*H (CM)	台重(kg)	装箱数	整箱尺寸(CM)	整箱重(kg)
20201	调温补胎机	28*25*37	7.8	1	29*26*38	8.6

定时恒温补胎机

- 1、可修补各种车辆内胎、小车外胎、真空胎
- 2、可更换各种车辆内胎气门咀（铝模选购）
- 3、用户可自行设定修补温度，自动保持恒温
- 4、定时关机

Timing Tube Plate Vulcanizer

- Thermostatically control
- Automatically shutdown and music on with timer




编 号	规 格	L*W*H (CM)	台重(kg)	装箱数	整箱尺寸(CM)	整箱重(kg)
20101	经济定时补胎机	30*25*39	9	1	31*26*40	10

自动恒温补胎机 Tube Plate Vulcanizer



编 号	规 格	L*W*H (CM)	台重(kg)	装箱数	整箱尺寸(CM)	整箱重(kg)
20400	圆头恒温补胎机	30*20*40	6.8	1	31*21*41	7.5
20401	椭圆恒温补胎机	30*20*40	6.8	1	31*21*41	7.5

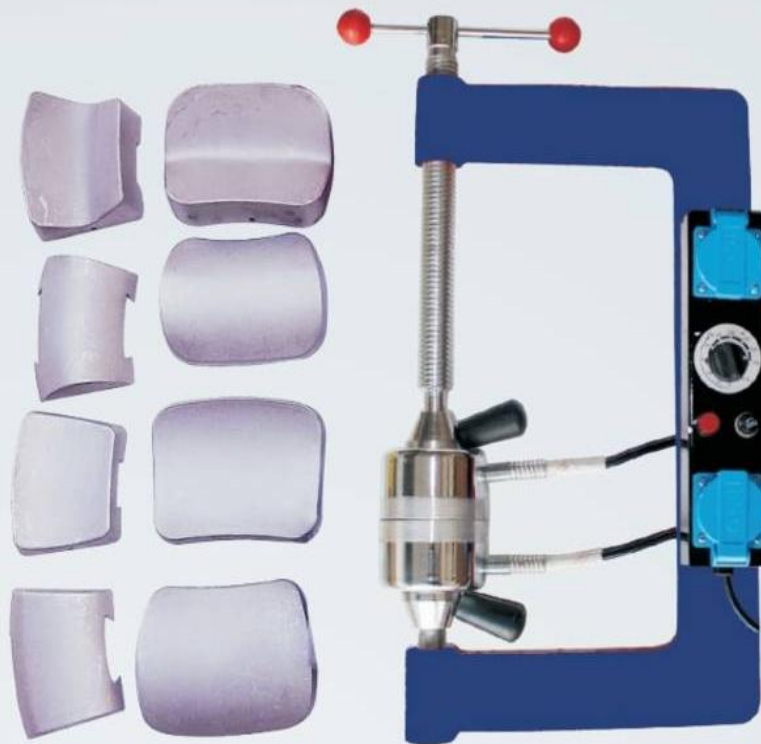

20501 八块模具版

- 1、可修补165-235小车内外胎，及7.50R16-12.00R20等大车外胎、真空胎；
- 2、配8块铝模具，可修补胎面、胎侧及胎肩伤口；
- 3、定时开关，自动关机，内置自动控温器，可自动保持恒温。

点式硫化机/内外胎修补机



20500 四块模具版

- 1、可修补165-235小车内外胎，及7.50R16-12.00R20等大车外胎、真空胎；
- 2、标配4块铝模具，可修补3cm以内胎面及胎侧伤口；
- 3、内置自动控温器，可自动保持恒温。

Tire & Tube Vulcanizing Machine

It can repair truck tire shoulder, tread and sidewall. Repair time need 15 minutes. It also include individual contour plates and accessories.

- Electricity saving 30%.
- Automatic temperature control.
- Quick heating.

编 号	规 格	L*W*H (CM)	台重(kg)	装箱数	整箱尺寸(CM)	整箱重(kg)
20500	点式硫化机	63*35*9	11	1	65*36*9	12
20501	定时点式硫化机	60*35*8	14	1	61*35*9	15

精品气动扩胎机

Pneumatic Tire Spreader



产品特点：

- 1、采用加大，钢质脚踩阀；
- 2、LED节能工作灯；
- 3、机身钢板加厚；
- 4、铜滤芯空气处理器。

Features:

- 1, Using large, steel valve.
- 2, LED work lights.
- 3, Steel plate thickening.
- 4, Copper filter air source processor.



全钢脚踏阀



LED节能工作灯



铜网气源处理器



出厂包装箱

编 号	规 格	L*W*H(CM)	台重(kg)	装箱数	整箱尺寸(CM)	整箱重(kg)
40400	气动扩胎机	54*56*92	52	1	55*57*93	55

大车轮胎点式硫化机

TRUCK TIRE REPAIR VULCANIZER

适用于: 8.25~12.00R20子午线轮胎
12R22.5~315R22.5真空胎

产品特点:

- 1、最大修补伤口 $\leq 6\text{cm}$, 代替大硫化机, 节约成本;
- 2、铸入式电加热板, 高效节能, 发热快, 使用寿命长;
- 3、结构坚固, 功能多样, 真空胎, 内胎, 外胎均可修补;
- 4、140度自动调节硫化温度, 保障不过硫, 不损伤轮胎。

Product Features:

Truck(passenger) tire vulcanizer designed specifically for 8.25-16 to 14.00-20, car 145-275 and heated vulcanization of the repaired of the other tire. It can repair tire shoulder, tread, sidewall.

The function of the Vulcanizer: Thermostatically controlled, Including six vulcanizer plates, quick heating, electricity-saving 30%.

12R22.5轮胎“胎面、胎肩、胎侧”修补示意图



参数名称	参数值	参数名称	参数值
额定功率	800W*2	工作温度	140度
额定电压	220V	加热时间	20~30分钟

编号	规格	L*W*H (CM)	台重(kg)	装箱数	整箱尺寸(CM)	整箱重(kg)
21000	大车点式硫化机	35*21*61	30	1	36*22*62	32

数显轮胎充气表/胎压枪

Digital Tire Inflation Gauge



11801



11802



11803



11804



11805

Digital Tire Inflating Gun

- Display tire pressure with digital number.
- Inflating and deflating.
- Copper straight chuck.
- High pressure rubber hose.

编 号	规 格	L*W*H (cm)	单个重 (g)	装箱数	整箱尺寸 (CM)	整箱重 (kg)
11801	高端数显A01	32*15*11	800	12	46*34*33	11
11802	高端数显A02	30*18*11	850	12	46*34*33	12
11803	高端数显A03	30*18*9	750	12	46*34*33	10
11804	经济型数显C01	34*14*4	400	20	38*34*32	10
11805	普通数显B07	30*16*11	650	12	46*34*33	9

轮胎充气表/胎压枪
Tire Inflation Gauge



11300



11301



11302

- High quality copper inflation chuck, silicone rubber seal.
- Copper inflation switch, deflation valve.
- High quality aluminum alloy handle.
- High pressure rubber inflation hose.

编 号	规 格	L*W*H (MM)	单个重(g)	装箱数	整箱尺寸(CM)	整箱重(kg)
11300	1.2Mpa普通表	345*138*32	460	20	38*34*32	11
11301	1.6Mpa充油表	345*138*32	600	20	38*34*32	13
11302	背光数显表	345*138*32	550	20	38*34*32	12



普通款充气演示



充油款充气演示



数显款充气演示



优质铜夹头，硅
胶密封垫



纯铜充气开关、
排气阀



认准“世平”注
册商标



优质铝合金手柄

高压型打气嘴、抽气嘴、充气表

Hige Pressure Inflation Chuck & Gauge, Deflation Chuck



10700



10701



10800



10901

编 号	规 格	L*W*H (MM)	个重(g)	装箱数	整箱尺寸(CM)	整箱重(kg)
10700	普接可调加气嘴	50*72*22	70	100	38*24*32	8.5
10701	快接可调加气嘴	85*72*22	75	100	38*24*32	9
10801	普接加气嘴	50*70*20	56	100	38*24*32	7
10901	快接抽气嘴	95*72*22	90	100	38*24*32	10.5
10903	普通软管抽气嘴	195*62*19	100	100	38*24*32	11
11100	带阀门加气嘴	570*75*32	200	100	38*34*32	20
11101	充气量压表	570*75*32	300	50	38*34*32	16
11102	快接充气表	570*35*28	320	50	38*34*32	17

轮胎快速充气装置-工程车辆专用

Fast Inflation Tool for Engineering Vehicle

适用对象:

大型车辆轮胎12V1气门嘴专用(12mm)

产品特点:

工程自卸车辆轮胎快速充气工具，如不使用此装置，巨型轮胎充气时间需要20-30分钟，使用该产品6-8分钟完成充气，节省工时5倍以上。



编 号	规 格	L*W*H(MM)	单个重(g)	装箱数	整箱尺寸(CM)	整箱重(kg)
10212	49cm工程带表	490*80*35	630	20	58*23*30	13.6
10211	49cm工程普通	490*35*25	700	20	58*23*30	15

Suitable for Engineering Truck Tire Valve, 12V1 valve special Inch.(12mm)

Advantage: This new tools is used for inflation large truck tires or wheels. It can help you inflating a big tire very fast. You only need 6 to 8 minutes. If doesn't use this tool, the time you need must be 30 minutes.



1、将装置旋装到内轮胎气门嘴螺纹上;
1. Screw the device onto the thread of the inner wheel tire valve;



2、用加长气门芯扳手将内轮胎气门芯取出;
2. Use a long valve core wrench to remove the inner tire valve core;



3、取出气门芯的同时关闭阀门;
3. Close the valve while taking out the valve core;



4、接上压缩空气快速接头，打开阀门开始充气;
4. Connect the compressed air quick coupler and open the valve to start the inflation;



5、轮胎压力达到时，关闭阀门，取下快速接头;
5. When the tire pressure is reached, close the valve and remove the quick coupler



6、用加长气门芯扳手将气门芯放入装置孔内;
6. Using the long wrench to insert the valve core into the hole of the device



7、打开阀门的同时，用力将气门芯往内推，旋紧气门芯，完成充气。
7. While opening the valve, push the valve core wrench hardly, tighten the valve core and complete the inflation.

精品大阀门-轮胎快速充气装置

High Quality Big Valve Fast Inflation Tools




- 球阀加大，寿命延长3倍以上；
- 精密无缝钢管、热处理加工；
- 可拆装气门嘴防尘帽；
- 带导向套筒，与气门嘴连接更容易。
- Inflating daul-wheel tire only need 3 minutes.
- Valve core of the inside wheel can be easily fitted or replaced.
- Can easily remove the valve cap.

编 号	规 格	L*W*H(MM)	单个重(g)	装箱数	整箱尺寸(CM)	整箱重(kg)
10200	36cm精品加长	360*28*23	285	50	42*28*18	15
10201	20cm精品短杆	200*28*23	200	50	42*28*18	11
10204	22cm精品带表	220*60*28	290	20	42*28*18	6.8
10205	38cm精品带表	380*60*28	380	20	42*28*18	8.5

短/加长/特长-轮胎快速充气装置

Various Specs Fast Inflation Tools

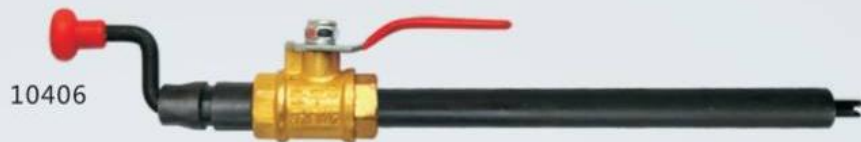

10406



10407



10408



10409


10406 快速充气装置-18cm黑色短杆
Fast Tire Inflation Tool (18cm Blackening)

10407 快速充气装置-36cm黑色加长
Fast Tire Inflation Tool (36cm Blackening)

10408 快速充气装置-50cm黑色特长
Fast Tire Inflation Tool (50cm Blackening)

10409 快速充气装置-50cm彩色特长
Fast Tire Inflation Tool (50cm Zinc Plated)

编 号	规 格	L*W*H (MM)	单个重(g)	装箱数	整箱尺寸(CM)	整箱重(kg)
10406	18cm黑色短杆	180*63*32	152	100	38*34*32	16
10407	36cm黑色加长	360*63*32	245	100	32*30*43	25
10408	50cm黑色特长	500*63*32	320	100	58*23*30	33
10409	50cm彩色特长	500*63*32	320	100	58*23*30	33

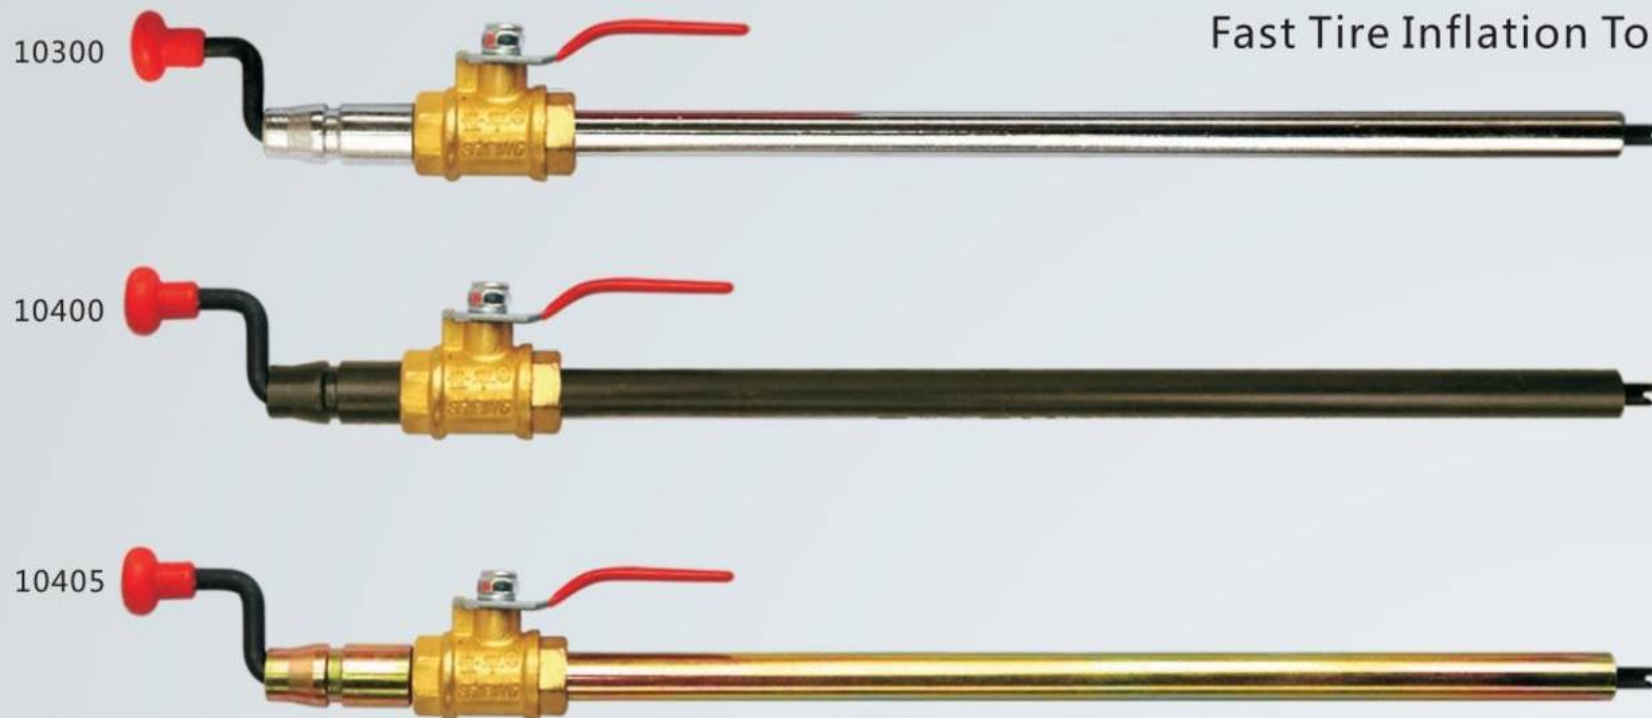

10300 快速充气装置-28cm镀铬
Fast Tire Inflation Tool (28cm Chromium plated)

10400 快速充气装置-28cm黑色
Fast Tire Inflation Tool (28cm Blackening)

10405 快速充气装置-28cm镀彩
Fast Tire Inflation Tool (28cm Zinc Plated)

编 号	规 格	L*W*H (MM)	单个重(g)	装箱数	整箱尺寸 (CM)	整箱重(kg)
10300	28cm镀铬	360*28*23	210	100	38*26*27	22
10400	28cm黑色	200*28*23	210	100	38*26*27	22
10405	28cm镀彩	200*28*23	210	100	38*26*27	22



1、将装置旋装到内轮胎气门嘴螺纹上;
1. Screw the device onto the thread of the inner wheel tire valve;



2、用加长气门芯扳手将内轮胎气门芯取出;
2. Use a long valve core wrench to remove the inner tire valve core;



3、取出气门芯的同时关闭阀门;
3. Close the valve while taking out the valve core;



4、接上压缩空气快速接头, 打开阀门开始充气;
4. Connect the compressed air quick coupler and open the valve to start the inflation;



5、轮胎压力达到时, 关闭阀门, 取下快速接头;
5. When the tire pressure is reached, close the valve and remove the quick coupler



6、用加长气门芯扳手将气门芯放入装置孔内;
6. Using the long wrench to insert the valve core into the hole of the device



7、打开阀门的同时, 用力将气门芯往内推, 旋紧气门芯, 完成充气。
7. While opening the valve, push the valve core wrench hardly, tighten the valve core and complete the inflation.

带表型-轮胎快速充气装置

Fast Tire Inflation Gauge



产品特点：

- 装配2.5Mpa压力表,充气测压更方便；
- 表壳带抗震橡胶护套
- 卡车轮胎充气，只需三分钟！
- 2.5Mpa pressure gauge,pressure measurement more convenient when inflating.
- Anti-vibration rubber sheath.
- Inflating a truck tire only need 3 minutes!

编 号	规 格	L*W*H (MM)	单个重(g)	装箱数	整箱尺寸(CM)	整箱重(kg)
10100	28cm镀铬带表	280*73*32	300	50	38*34*32	16
10101	28cm镀彩带表	280*73*32	300	50	38*34*32	16
10102	28cm充油带表	280*73*32	310	50	38*34*32	16.5

精品大阀门-轮胎快速充气装置

High Quality Big Valve Fast Inflation Tools



- 球阀加大，寿命延长3倍以上；
- 精密无缝钢管、热处理加工；
- 可拆装气门嘴防尘帽；
- 带导向套筒，与气门嘴连接更容易。
- Inflating daul-wheel tire only need 3 minutes.
- Valve core of the inside wheel can be easily fitted or replaced.
- Can easily remove the valve cap.

编 号	规 格	L*W*H(MM)	单个重(g)	装箱数	整箱尺寸(CM)	整箱重(kg)
10200	36cm精品加长	360*28*23	285	50	42*28*18	15
10201	20cm精品短杆	200*28*23	200	50	42*28*18	11
10204	22cm精品带表	220*60*28	290	20	42*28*18	6.8
10205	38cm精品带表	380*60*28	380	20	42*28*18	8.5

轮胎快速充气装置-工程车辆专用

Fast Inflation Tool for Engineering Vehicle



适用对象:

大型车辆轮胎12V1气门嘴专用(12mm)

产品特点:

工程自卸车辆轮胎快速充气工具, 如不使用此装置, 巨型轮胎充气时间需要20-30分钟, 使用该产品6-8分钟完成充气, 节省工时5倍以上。



编 号	规 格	L*W*H(MM)	单个重(g)	装箱数	整箱尺寸(CM)	整箱重(kg)
10212	49cm工程带表	490*80*35	630	20	58*23*30	13.6
10211	49cm工程普通	490*35*25	700	20	58*23*30	15

Suitable for Engineering Truck Tire Valve, 12V1 valve special Inch.(12mm)

Advantage: This new tools is used for inflation large truck tires or wheels. It can help you inflating a big tire very fast. You only need 6 to 8 minutes. If doesn't use this tool, the time you need must be 30 minutes.



1. 将装置旋装到内轮胎气门嘴螺纹上;
1. Screw the device onto the thread of the inner wheel tire valve;



2. 用加长气门芯扳手将内轮胎气门芯取出;
2. Use a long valve core wrench to remove the inner tire valve core;



3. 取出气门芯的同时关闭阀门;
3. Close the valve while taking out the valve core;



4. 接上压缩空气快速接头, 打开阀门开始充气;
4. Connect the compressed air quick coupler and open the valve to start the inflation;



5. 轮胎压力达到时, 关闭阀门, 取下快速接头;
5. When the tire pressure is reached, close the valve and remove the quick coupler



6. 用加长气门芯扳手将气门芯放入装置孔内;
6. Using the long wrench to insert the valve core into the hole of the device



7. 打开阀门的同时, 用力将气门芯往内推, 旋紧气门芯, 完成充气。
7. While opening the valve, push the valve core wrench hardly, tighten the valve core and complete the inflation.

轮胎快速充气装置-2020新款

Truck Tire Fast Inflation Tool



- 数控加工，更高标准；
- 纯铜阀体，更好阀门；
- 加厚精密无缝钢管；
- 新款设计，使用便捷，手感更佳。
- CNC machining, higher standards;
- Copper valve body, better valve;
- Thickened precision seamless steel pipe.
- New design, Easy to use and feels better.



Suitable for Truck & Bus Tires, 8V1 valve.(8mm)

Advantage:

This new tools is used for inflation, Such as truck, bus and other vehicle which have daul-wheels. It can help you to inflate a big tire very fast. You only need 3~4 minutes. If doesn't use this tool, the time you need must be 15 minutes.

Using this product, you don't need to remove the side wheel, Valve core of the inside wheel can be easily replaced, in order to the compressed air fast going into the inside wheel tire.

编 号	规 格	L*W*H (MM)	单个重 (g)	装箱数	整箱尺寸 (CM)	整箱重 (kg)
10217	7cm超短外轮用	70*35*22	100	100	38*24*32	11
10218	43cm新款加长	450*35*22	360	50	58*23*30	19
10219	43cm新款B款加长	450*35*22	350	50	58*23*30	18.5
10227	美标7cm超短外轮	70*35*22	100	100	38*24*32	11
10228	美标43cmA款加长	450*35*22	360	50	58*23*30	19
10229	美标43cmB款加长	450*35*22	350	50	58*23*30	18.5

THANK YOU FOR YOUR INTEREST
IN OUR PRODUCTS!

www.int-besttyre.com

